




# PROTECT 900

## SPECIFICATIONS

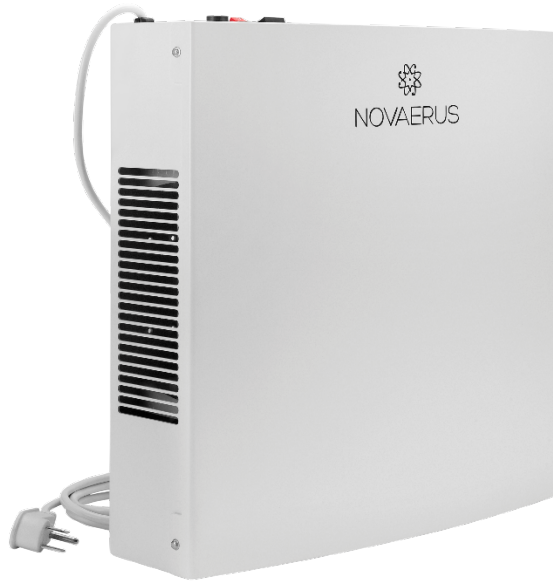

*Designed for continuous air disinfection and odor control in medium indoor spaces, the Novaerus Protect 900 uses patented filter-free ultra-low energy plasma technology with a 2-speed fan.*



### MODEL

NV900

Placed on stand or wall mounted  
Supplied with 8.2 ft power cord

### ELECTRICAL RATING

120 VAC, 60 Hz, 1.07 A  
Fuse Rated at 250 VAC, 3 Amps, Listed

### POWER CONSUMPTION

20 watts

### CONSTRUCTION + COLOR

Precision-cut fabricated metal casing in a white anti-bacterial powder coat finish

### DIMENSIONS + WEIGHT

14.4" w x 14.4" h x 4.5" d  
10.4 lbs.

### ELECTRICAL CONNECTION

Switched and fused with a grounded, molded 3 pin power cord

### FAN AIR FLOW VOLUME

SPEED I: 150 ft<sup>3</sup>/min  
SPEED II: 180 ft<sup>3</sup>/min

### OPERATING CONDITIONS

10-35°C, 10-75% Relative Humidity, 2000m

### SHIPPING / STORAGE CONDITIONS

5°C-50°C, Maximum 95% Relative Humidity

### QUALITY + SAFETY

Manufactured under ISO 9001, ISO 14001 and OHSAS 18001  
This air cleaner complies with the federal ozone emissions limit, ARB certified

7525 SE 24<sup>th</sup> Street | Suite 510 | Mercer Island | WA 98040 | USA  
T: 1.866.508.1118 | [www.novaerus.com](http://www.novaerus.com)

Document No. 610-00-0157 Rev K  
COPYRIGHT © 2017 NOVAERUS US, INC.